
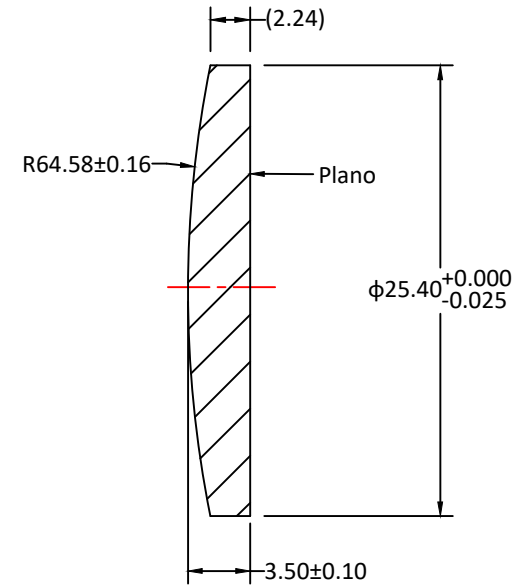


RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
64.58 CX	±0.16	3	0.5	90%	25.40	+0/-0.025	H-K9L	517642	3.50	±0.10
Plano	-	3	0.5	90%						

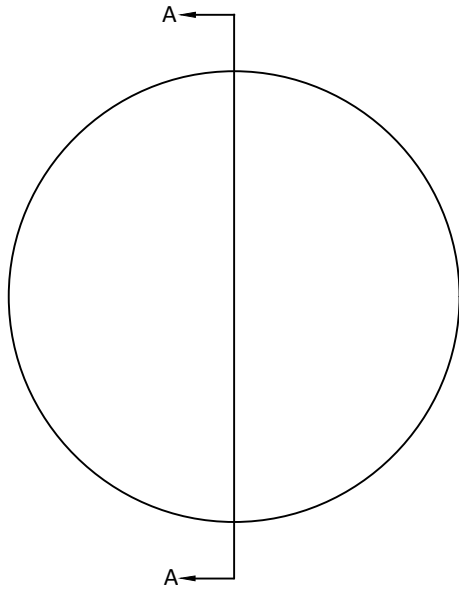

SECTION A-A

Notes:

1. ALL DIMENSIONS IN MM
2. TOLERANCE UNLESS SPECIFIED ± 0.10
3. MATERIAL: OPTICAL GLASS H-K9L
4. MANUFACTURE PER MIL-PRF-13830
5. POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
6. FOCAL LENGTH(EFL): $125.00 \pm 1\%$
7. SURFACE QUALITY : 40-20 SCRATCH-DIG
8. CHAMFER EDGES: $0.5 \times 45^\circ$ MAX UNLESS SPECIFIED
9. CENTRATION TOLERANCE: 1.0' MINUTES MAX
10. COATING: S1 & S2: $R_{avg} < 0.35\%$ @ 420-680nm @ 0° AOI

UNLESS OTHERWISE SPECIFIED:		NAME		DATE		 OPTICAL MANUFACTURER FROM CHINA					
DIMENSIONS ARE IN mm TOLERANCES: FRACTIONAL ± ANGULAR: ±3 ARC MIN TWO PLACE DECIMAL: ±0.10 THREE PLACE DECIMAL: ±0.05		DRAWN		Sally Song		9.22.24		TITLE: DIAMETER 25.40MM, EFL 125.00MM, H-K9L, VIS 0 COATED, PLANO-CONVEX LENS			
		CHECK									
		ENG APPR.									
		MFG APPR.									
INTERPRET GEOMETRIC TOLERANCING PER:		QA		Ann Chen		12.18.24		SIZE A	DWG.NO. L-PX003012525Z		REV 0
MATERIAL H-K9L		COMMENTS									
FINISH											
DO NOT SCALE DRAWING		PROJECT NO.				SCALE:		WEIGHT:		SHEET 1 OF 1	