
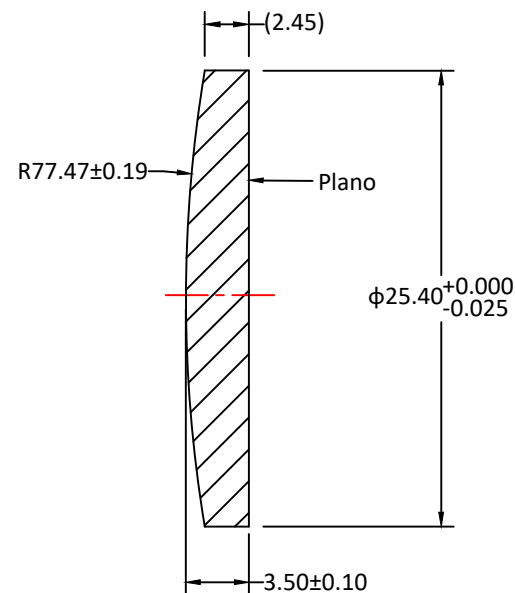


RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
77.47 CX	±0.19	3	0.5	90%	25.40	+0/-0.025	H-K9L	517642	3.50	±0.10
Plano	-	3	0.5	90%						

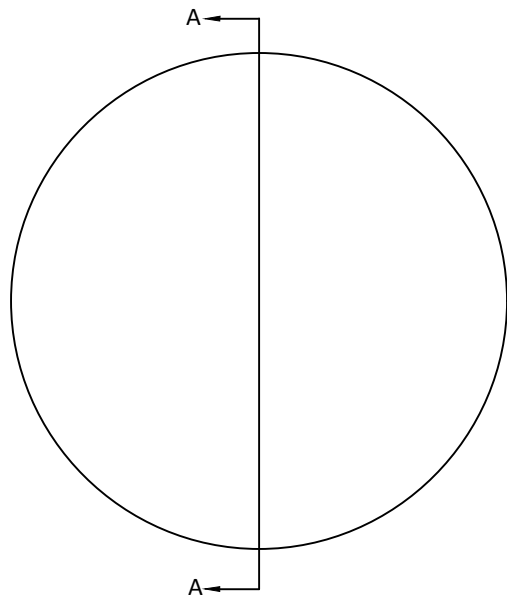

SECTION A-A

Notes:

1. ALL DIMENSIONS IN MM
2. TOLERANCE UNLESS SPECIFIED ± 0.10
3. MATERIAL: OPTICAL GLASS H-K9L
4. MANUFACTURE PER MIL-PRF-13830
5. POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
6. FOCAL LENGTH(EFL): 150.00 $\pm$ 1%
7. SURFACE QUALITY : 40-20 SCRATCH-DIG
8. CHAMFER EDGES: 0.5 $\times$ 45°MAX UNLESS SPECIFIED
9. CENTRATION TOLERANCE: 1.0' MINUTES MAX
10. COATING: S1 & S2: Ravg<0.35% @ 420-680nm @ 0° AOI

UNLESS OTHERWISE SPECIFIED:			NAME	DATE		
DIMENSIONS ARE IN mm TOLERANCES: FRACTIONAL ± ANGULAR: ±3 ARC MIN TWO PLACE DECIMAL: ±0.10 THREE PLACE DECIMAL: ±0.05		DRAWN	Sally Song	9.12.24	TITLE: DIAMETER 25.40MM, EFL 150.00MM, H-K9L, VIS 0 COATED, PLANO-CONVEX LENS	
		CHECK				
		ENG APPR.				
		MFG APPR.				
INTERPRET GEOMETRIC TOLERANCING PER:		QA	Ann Chen	12.18.24	REV 0	
MATERIAL H-K9L		COMMENTS				
FINISH						
DO NOT SCALE DRAWING		PROJECT NO.			SIZE A	DWG.NO. L-PX003015025Z
					SCALE:	WEIGHT:
					SHEET 1 OF 1	

A

DWG.NO.

L-PX003015025Z

0

SCALE:

WEIGHT:

SHEET 1 OF 1