
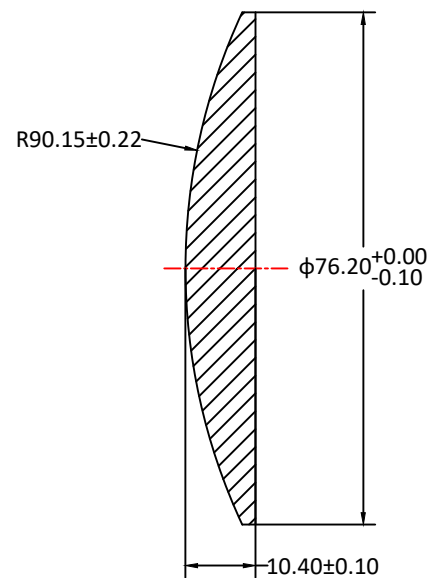


RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
90.15 CX	±0.22	3	1	90%	76.20	+0/-0.10	H-K9L	517642	10.40	±0.10
Plano	-	3	1	90%						

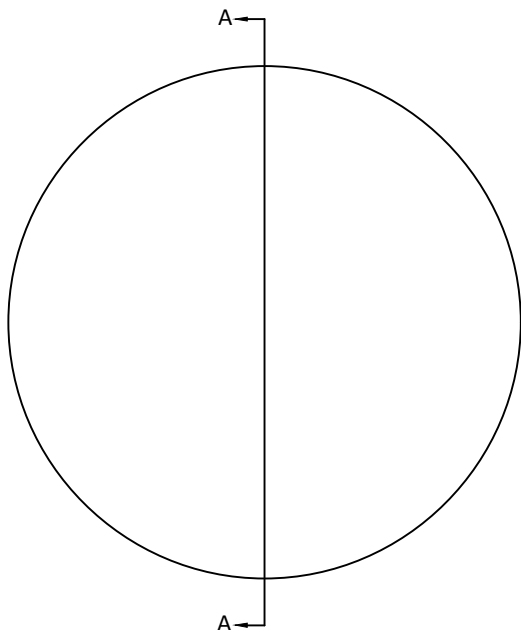

SECTION A-A

Notes:

1. ALL DIMENSIONS IN MM
2. TOLERANCE UNLESS SPECIFIED ± 0.10
3. MATERIAL: GRADE B, FA PER MIL-G-174, CDGM OR EQUIVALENT, ROHS COMPLIANT
4. MANUFACTURE PER MIL-PRF-13830
5. POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
6. FOCAL LENGTH(EFL): 175.00±1%
7. SURFACE QUALITY : 40-20 SCRATCH-DIG
8. CHAMFER EDGES: 0.5×45°MAX UNLESS SPECIFIED
9. CENTRATION TOLERANCE: 1.0' MINUTES MAX
10. COATING: S1 & S2: Ravg0.8%@ 400-950nm @ 0° AOI

UNLESS OTHERWISE SPECIFIED:			NAME	DATE	 MANUFACTURER FROM CHINA		
DIMENSIONS ARE IN mm TOLERANCES: FRACTIONAL ± ANGULAR: ±3 ARC MIN TWO PLACE DECIMAL: ±0.10 THREE PLACE DECIMAL: ±0.05		DRAWN	Sally Song	7.16.24	TITLE: DIAMETER 76.20MM, EFL 175.00MM, H-K9L, VIS-NIR1 COTAED, PLANO-CONVEX LENS		
		CHECK					
		ENG APPR.					
		MFG APPR.					
INTERPRET GEOMETRIC TOLERANCING PER:		QA	Ann Chen	12.17.24	SIZE A DWG.NO. L-PX904017576Z REV 0		
MATERIAL H-K9L		COMMENTS					
FINISH							
DO NOT SCALE DRAWING		PROJECT NO.			SCALE:	WEIGHT:	SHEET 1 OF 1