
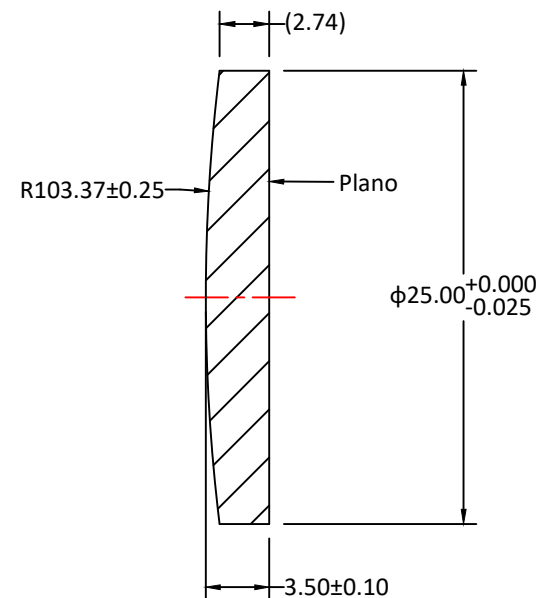


RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
103.37 CX	±0.25	3	0.5	90%	25.00	+0/-0.025	H-K9L	517642	3.50	±0.10
Plano	-	3	0.5	90%						

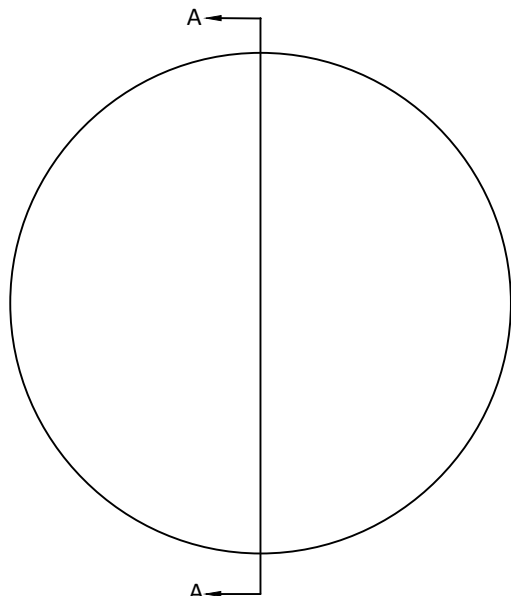

SECTION A-A

Notes:

- ALL DIMENSIONS IN MM
- TOLERANCE UNLESS SPECIFIED ± 0.10
- MATERIAL: OPTICAL GLASS H-K9L
- MANUFACTURE PER MIL-PRF-13830
- POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
- FOCAL LENGTH(EFL): $200.00 \pm 1\%$
- SURFACE QUALITY : 40-20 SCRATCH-DIG
- CHAMFER EDGES: $0.5 \times 45^\circ$ MAX UNLESS SPECIFIED
- CENTRATION TOLERANCE: 1.0' MINUTES MAX
- COATING: S1 & S2: Ravg 0.8% @ 400-950nm @ 0° AOI

UNLESS OTHERWISE SPECIFIED:			NAME	DATE	 OPTICAL MANUFACTURER FROM CHINA		
DIMENSIONS ARE IN mm TOLERANCES: FRACTIONAL ± ANGULAR: ±3 ARC MIN TWO PLACE DECIMAL: ±0.10 THREE PLACE DECIMAL: ±0.05		DRAWN	Sally Song	9.12.24	TITLE: DIAMETER 25.00MM, EFL 200.00MM, H-K9L, VIS-NIR1 COTAED, PLANO-CONVEX LENS		
		CHECK					
		ENG APPR.					
		MFG APPR.					
INTERPRET GEOMETRIC TOLERANCING PER:		QA	Ann Chen	12.18.24	SIZE DWG.NO. A L-PX0040200025		
MATERIAL H-K9L		COMMENTS					
FINISH							
DO NOT SCALE DRAWING		PROJECT NO.			SCALE:	WEIGHT:	SHEET 1 OF 1

SIZE
A

DWG.NO.
L-PX0040200025

REV
0