
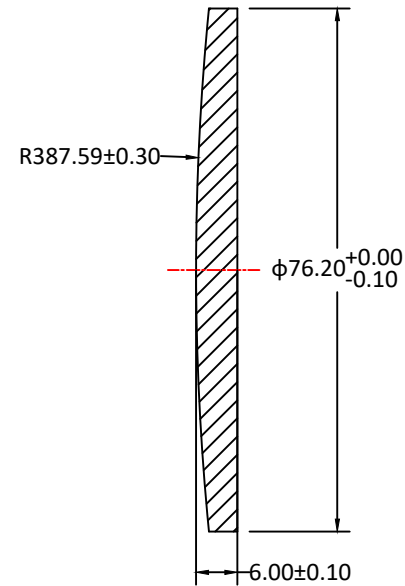


RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
387.59 CX	±0.30	3	1	90%	76.20	+0/-0.10	H-K9L	517642	6.00	±0.10
Plano	-	3	1	90%						

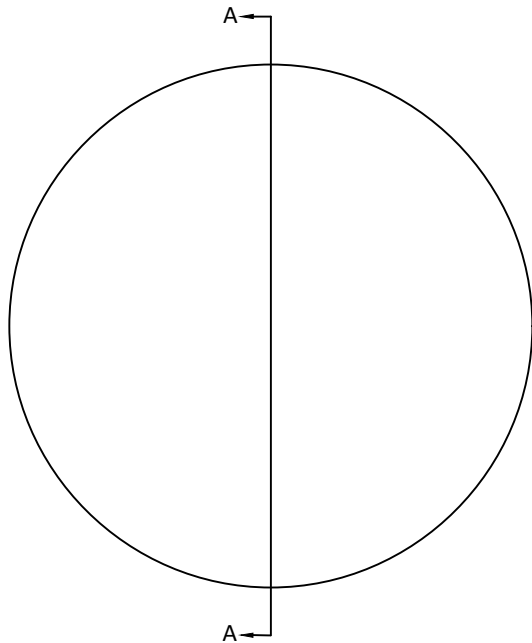

SECTION A-A

Notes:

1. ALL DIMENSIONS IN MM
2. TOLERANCE UNLESS SPECIFIED ± 0.10
3. MATERIAL: GRADE B, FA PER MIL-G-174, CDGM OR EQUIVALENT, ROHS COMPLIANT
4. MANUFACTURE PER MIL-PRF-13830
5. POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
6. FOCAL LENGTH(EFL): 750.00 $\pm$ 1%
7. SURFACE QUALITY : 40-20 SCRATCH-DIG
8. CHAMFER EDGES: 0.5 $\times$ 45°MAX UNLESS SPECIFIED
9. CENTRATION TOLERANCE: 1.0' MINUTES MAX
10. COATING: S1 & S2: Ravg0.8%@ 400-950nm @ 0° AOI

UNLESS OTHERWISE SPECIFIED:		NAME		DATE						
DIMENSIONS ARE IN mm TOLERANCES: FRACTIONAL ± ANGULAR: ±3 ARC MIN TWO PLACE DECIMAL: ±0.10 THREE PLACE DECIMAL: ±0.05		DRAWN	Sally Song	7.20.24		TITLE: DIAMETER 76.20MM, EFL 750.00MM, H-K9L, VIS-NIR1 COTAED, PLANO-CONVEX LENS				
		CHECK								
		ENG APPR.								
		MFG APPR.								
INTERPRET GEOMETRIC TOLERANCING PER:		QA	Ann Chen	12.17.24		SIZE DWG.NO. A L-PX004075076Z REV 0				
MATERIAL H-K9L		COMMENTS								
FINISH										
DO NOT SCALE DRAWING		PROJECT NO.			SCALE:		WEIGHT:		SHEET 1 OF 1	