
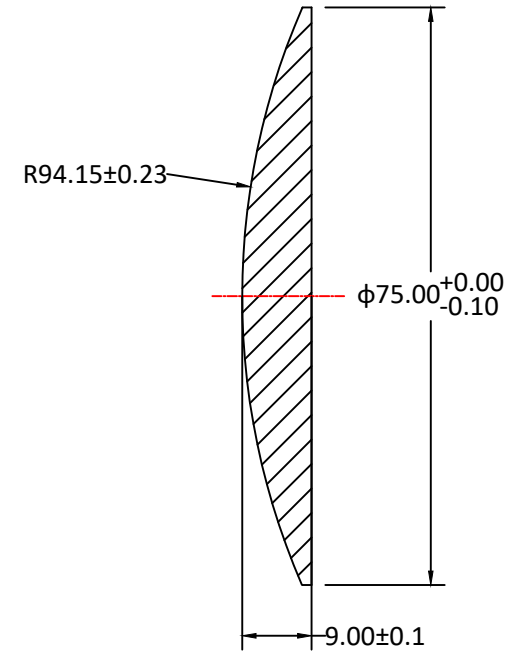


RADIUS	R TOL	POWER	IRRG	CA
94.15 CX	±0.23	5	1	90%
Plano	-	5	1	90%

DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
75.00	+0/-0.10	H-K51	523586	9.00	±0.10

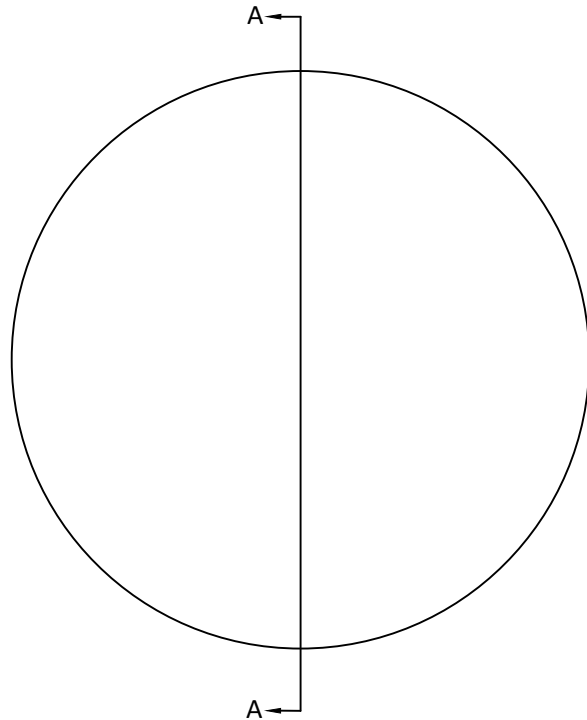

SECTION A-A

Notes:

1. ALL DIMENSIONS IN MM
2. TOLERANCE UNLESS SPECIFIED ± 0.10
3. MATERIAL: GRADE B, FA PER MIL-G-174, CDGM OR EQUIVALENT, ROHS COMPLIANT
4. MANUFACTURE PER MIL-PRF-13830
5. POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
6. FOCAL LENGTH(EFL): 180.00±1%
7. SURFACE QUALITY : 40-20 SCRATCH-DIG
8. CHAMFER EDGES: 0.5×45°MAX UNLESS SPECIFIED
9. CENTRATION TOLERANCE: 1.0' MINUTES MAX
10. COATING: S1 & S2: Ravg0.5% @ 630-1100nm @ 0°AOI

UNLESS OTHERWISE SPECIFIED:			NAME	DATE	 OPTICAL MANUFACTURER FROM CHINA			
DIMENSIONS ARE IN mm TOLERANCES: FRACTIONAL ± ANGULAR: ±3 ARC MIN TWO PLACE DECIMAL: ±0.10 THREE PLACE DECIMAL: ±0.05		DRAWN	Sally Song	7.12.24				
		CHECK						
		ENG APPR.						
		MFG APPR.						
INTERPRET GEOMETRIC TOLERANCING PER:		QA	Ann Chen	12.17.24	TITLE: DIAMETER 75MM, EFL 180.00MM, H-K51, NIR 1 COATED, PLANO-CONVEX LENS			
MATERIAL H-K51		COMMENTS						
FINISH								
DO NOT SCALE DRAWING		PROJECT NO.			SIZE A	DWG.NO. L-PX0050180075		REV 0
					SCALE:	WEIGHT:	SHEET 1 OF 1	