
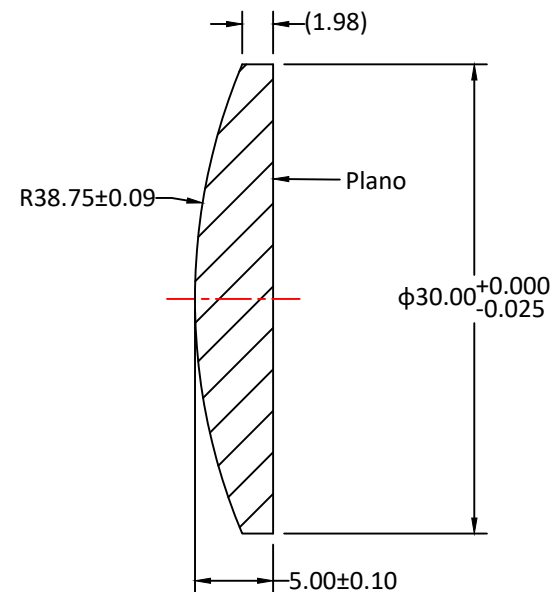


RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
38.75 CX	±0.09	3	0.5	90%	30.00	+0/-0.025	H-K9L	517642	5.00	±0.10
Plano	-	3	0.5	90%						

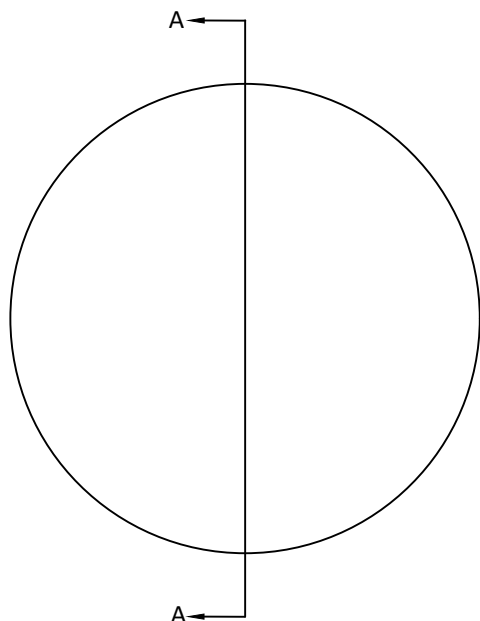

SECTION A-A

Notes:

1. ALL DIMENSIONS IN MM
2. TOLERANCE UNLESS SPECIFIED ± 0.10
3. MATERIAL: OPTICAL GLASS H-K9L
4. MANUFACTURE PER MIL-PRF-13830
5. POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
6. FOCAL LENGTH(EFL): 75.00 $\pm 1\%$
7. SURFACE QUALITY : 40-20 SCRATCH-DIG
8. CHAMFER EDGES: 0.5 $\times$ 45°MAX UNLESS SPECIFIED
9. CENTRATION TOLERANCE: 1.0' MINUTES MAX
10. COATING:S1 & S2: Ravg<0.5% @1050-1700nm @ 0°AOI

UNLESS OTHERWISE SPECIFIED:			NAME	DATE	 OPTICAL MANUFACTURER FROM CHINA		
DIMENSIONS ARE IN mm TOLERANCES: FRACTIONAL ± ANGULAR: ±3 ARC MIN TWO PLACE DECIMAL: ±0.10 THREE PLACE DECIMAL: ±0.05		DRAWN	Sylvia Lin	10.2.24			
		CHECK	Sally Song	10.8.24	TITLE: DIAMETER 30.00 MM, EFL 75.00MM, H-K9L, NIR 2 COATED, PLANO-CONVEX LENS		
		ENG APPR.					
		MFG APPR.					
		QA					
INTERPRET GEOMETRIC TOLERANCING PER:	COMMENTS			SIZE A DWG.NO. L-PX0060075030 REV 0			
MATERIAL H-K9L							
FINISH							
DO NOT SCALE DRAWING	PROJECT NO.			SCALE:	WEIGHT:	SHEET 1 OF 1	