
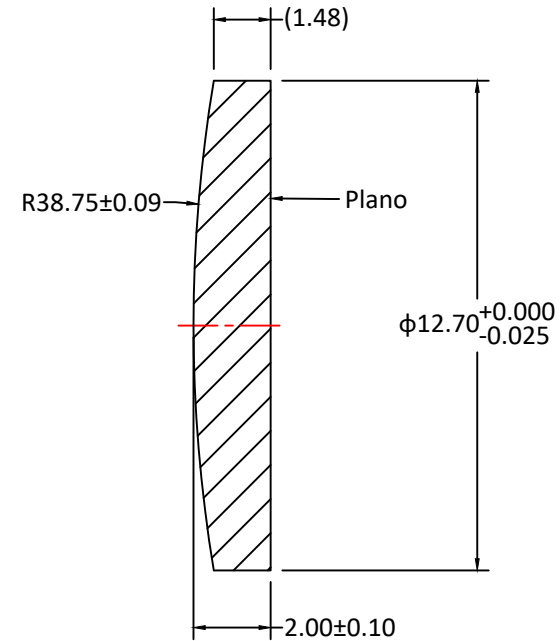


RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
38.75 CX	±0.09	3	0.5	90%	12.70	+0/-0.025	H-K9L	517642	2.00	±0.10
Plano	-	3	0.5	90%						

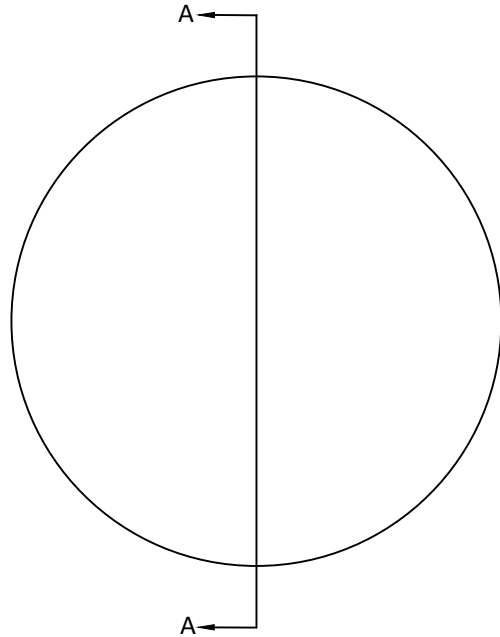

SECTION A-A

Notes:

1. ALL DIMENSIONS IN MM
2. TOLERANCE UNLESS SPECIFIED ± 0.10
3. MATERIAL: OPTICAL GLASS H-K9L
4. MANUFACTURE PER MIL-PRF-13830
5. POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
6. FOCAL LENGTH(EFL): $75.00 \pm 1\%$
7. SURFACE QUALITY : 40-20 SCRATCH-DIG
8. CHAMFER EDGES: $0.5 \times 45^\circ$ MAX UNLESS SPECIFIED
9. CENTRATION TOLERANCE: 1.0' MINUTES MAX
10. COATING: S1 & S2: $\frac{1}{4}$ WAVE MgF2 @ 550nm R(AVG) < 1.75% FROM 400-700nm H-K9L

UNLESS OTHERWISE SPECIFIED:		NAME	DATE		
DIMENSIONS ARE IN mm TOLERANCES: FRACTIONAL $\pm$ ANGULAR: ± 3 ARC MIN TWO PLACE DECIMAL: ± 0.10 THREE PLACE DECIMAL: ± 0.05	DRAWN	Sally Song	10.18.24		
	CHECK				
	ENG APPR.				
INTERPRET GEOMETRIC TOLERANCING PER:	MFG APPR.			TITLE: DIAMETER 12.70MM, EFL 75.00MM, H-K9L, MgF2 COATED, PLANO-CONVEX LENS	
MATERIAL H-K9L	QA	Ann Chen	12.17.24		
FINISH	COMMENTS			SIZE	DWG.NO.
DO NOT SCALE DRAWING	PROJECT NO.			A	L-PX002007512Z
				SCALE:	WEIGHT:
					SHEET 1 OF 1
				REV	0