
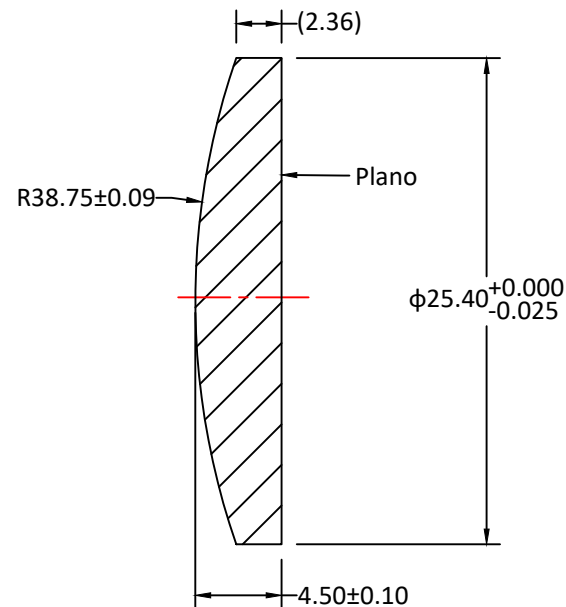


RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
38.75 CX	±0.09	3	0.5	90%	25.40	+0/-0.025	H-K9L	517642	4.50	±0.10
Plano	-	3	0.5	90%						

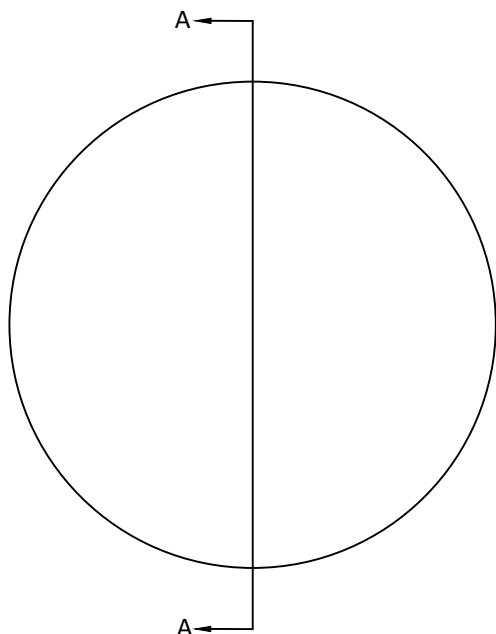

SECTION A-A

Notes:

1. ALL DIMENSIONS IN MM
2. TOLERANCE UNLESS SPECIFIED ± 0.10
3. MATERIAL: OPTICAL GLASS H-K9L
4. MANUFACTURE PER MIL-PRF-13830
5. POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
6. FOCAL LENGTH(EFL): 75.00 $\pm 1\%$
7. SURFACE QUALITY : 40-20 SCRATCH-DIG
8. CHAMFER EDGES: 0.5×45°MAX UNLESS SPECIFIED
9. CENTRATION TOLERANCE: 1.0' MINUTES MAX
10. COATING: S1 & S2: ¼ WAVE MgF2 @ 550nm R(AVG) < 1.75% FROM 400-700nm H-K9L

UNLESS OTHERWISE SPECIFIED:			NAME	DATE	 OPTICAL MANUFACTURER FROM CHINA	
DIMENSIONS ARE IN mm TOLERANCES: FRACTIONAL ± ANGULAR: ±3 ARC MIN TWO PLACE DECIMAL: ±0.10 THREE PLACE DECIMAL: ±0.05	DRAWN	Sylvia Lin	9.28.24			
	CHECK	Sally Song	10.4.24			
	ENG APPR.					
	MFG APPR.					
INTERPRET GEOMETRIC TOLERANCING PER:	QA	Ann Chen	12.18.24	TITLE: DIAMETER 25.40MM, EFL 75.00MM, H-K9L, MgF2 COATED PLANO-CONVEX LENS		
MATERIAL H-K9L	COMMENTS					
FINISH						
DO NOT SCALE DRAWING	PROJECT NO.	SIZE A		DWG.NO. L-PX002007525Z		REV 0
		SCALE:		WEIGHT:		SHEET 1 OF 1

REV
0