
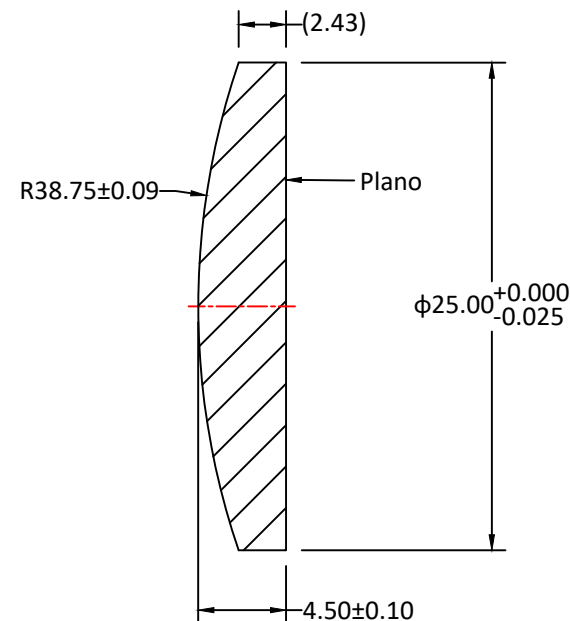


RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
38.75 CX	±0.09	3	0.5	90%	25.00	+0/-0.025	H-K9L	517642	4.50	±0.10
Plano	-	3	0.5	90%						

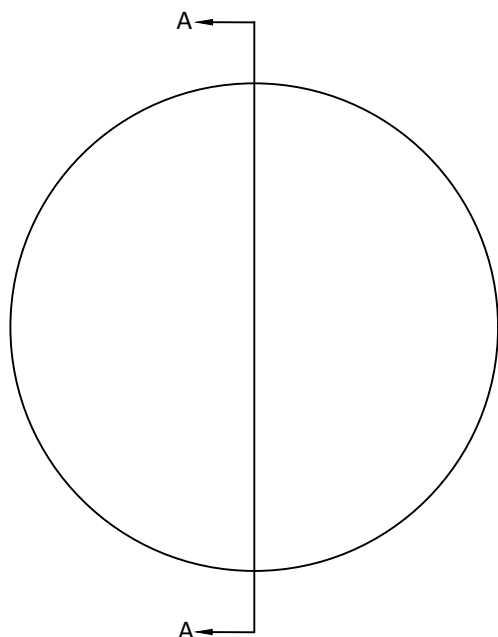

SECTION A-A

Notes:

1. ALL DIMENSIONS IN MM
2. TOLERANCE UNLESS SPECIFIED ± 0.10
3. MATERIAL: OPTICAL GLASS H-K9L
4. MANUFACTURE PER MIL-PRF-13830
5. POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
6. FOCAL LENGTH(EFL): 75.00 $\pm 1\%$
7. SURFACE QUALITY : 40-20 SCRATCH-DIG
8. CHAMFER EDGES: 0.5 $\times$ 45°MAX UNLESS SPECIFIED
9. CENTRATION TOLERANCE: 1.0' MINUTES MAX
10. COATING: S1 & S2: ¼ WAVE MgF2 @ 550nm R(AVG) < 1.75% FROM 400-700nm H-K9L

UNLESS OTHERWISE SPECIFIED:			NAME	DATE	 OPTICAL MANUFACTURER FROM CHINA			
DIMENSIONS ARE IN mm TOLERANCES: FRACTIONAL ± ANGULAR: ±3 ARC MIN TWO PLACE DECIMAL: ±0.10 THREE PLACE DECIMAL: ±0.05		DRAWN	Sylvia Lin	10.4.24	TITLE: DIAMETER 25.00MM, EFL 75.00MM, H-K9L, MgF2 COATED PLANO-CONVEX LENS			
		CHECK	Eva Du	10.8.24				
		ENG APPR.						
		MFG APPR.						
INTERPRET GEOMETRIC TOLERANCING PER:		QA	Ann Chen	12.18.24	SIZE A DWG.NO. L-PX0020075025 REV 0			
MATERIAL H-K9L		COMMENTS						
FINISH								
DO NOT SCALE DRAWING		PROJECT NO.			SCALE:		WEIGHT:	SHEET 1 OF 1