
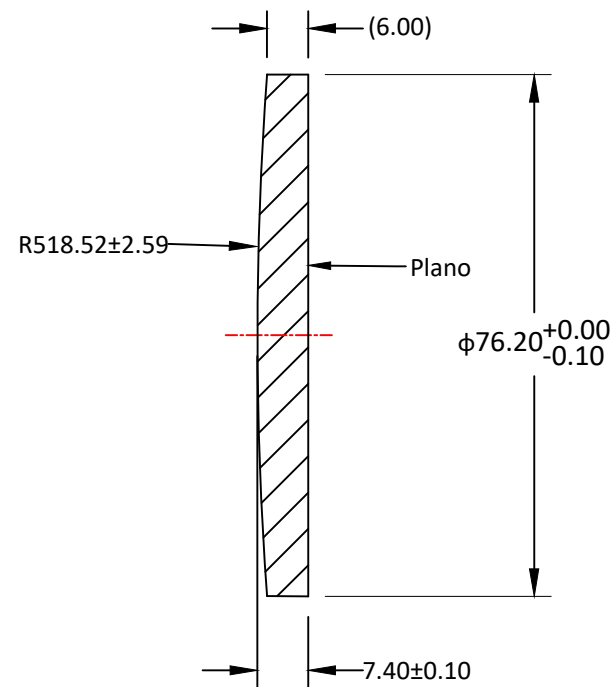


RADIUS	R TOL	POWER	IRRG	CA	DIA	DIA TOL	MATERIAL	INDEX	CT	CT TOL
518.52 CX	±2.59	-	2.0	95%	76.20	+0/-0.10	H-K9L	517642	7.40	±0.10
Plano	-	10	2.0	95%						

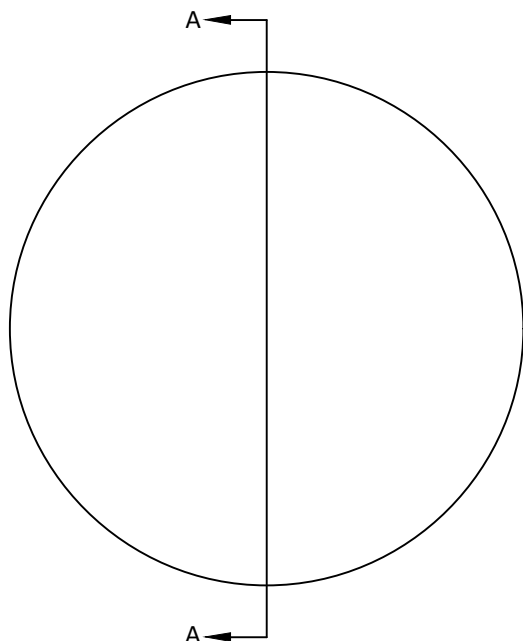

SECTION A-A

Notes:

1. ALL DIMENSIONS IN MM
2. TOLERANCE UNLESS SPECIFIED ± 0.10
3. MATERIAL: OPTICAL GLASS H-K9L
4. MANUFACTURE PER MIL-PRF-13830
5. POLISH TO TESTPLATE WITHIN POWER AND IRREGULARITY INDICATED (FRINGES)
6. FOCAL LENGTH(EFL): $1000.00 \pm 1\%$
7. SURFACE QUALITY : 60-40 SCRATCH-DIG
8. CHAMFER EDGES: $0.5 \times 45^\circ$ MAX UNLESS SPECIFIED
9. CENTRATION TOLERANCE: 3.0' MINUTES MAX
10. COATING: UNCOATED

UNLESS OTHERWISE SPECIFIED:				NAME		DATE		 OPTICAL MANUFACTURER FROM CHINA			
DIMENSIONS ARE IN mm TOLERANCES: FRACTIONAL ± ANGULAR: ±3 ARC MIN TWO PLACE DECIMAL: ±0.10 THREE PLACE DECIMAL: ±0.05		DRAWN		Sally Song		6.26.25		TITLE: DIAMETER 76.20MM, EFL 1000.00MM, H-K9L PLANO CONVEX LENSES			
		CHECK									
		ENG APPR.									
		MFG APPR.									
INTERPRET GEOMETRIC TOLERANCING PER:		QA						SIZE A DWG.NO. L-PX001100076Z REV C			
MATERIAL H-K9L		COMMENTS									
FINISH											
DO NOT SCALE DRAWING		PROJECT NO.				SCALE:		WEIGHT:		SHEET 1 OF 1	